OFT-420 - INSTRUCTION MANUAL

Description:

OFT-420 is designed for quick and easy indication of optical level in plastic optical fibers

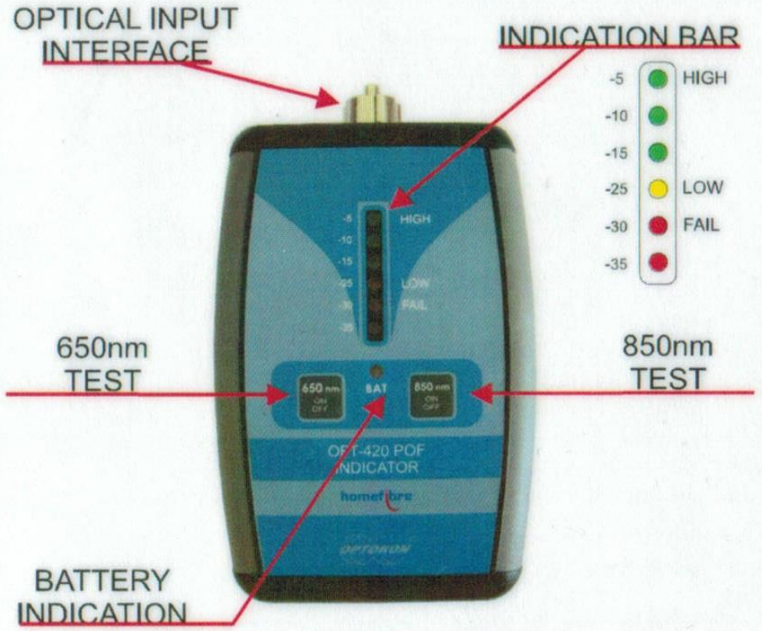

press indication time = 2 sec.

press &hold permanent indication

homefibre OPTOKON® FIBER OPTIC TECHNOLOGY CALIBRATION LABORATORY

BATTERY INDICATOR

- OK
- WARNING > change battery
- LOW > malfunction of device

OPTICAL INPUT ADAPTORS

TE-ADP-POF22	TE-ADP-250
universal adaptor 2,2mm	universal adaptor 2,5mm
POF with jacket 2,2mm	standard 2,5mm ferrule

Specification

Photodetector	3x3mm Si
Dynamic range	-35dBm to +10dBm
Working wavelengths	650nm, 850nm
Battery	9V Alkaline

POF INDICATOR MANUAL rev. 01